


4" x 60" Balcony Inspection Vent Model # CS2011-PG-Removable

4" Wide opening frame with 3.5" removable vent

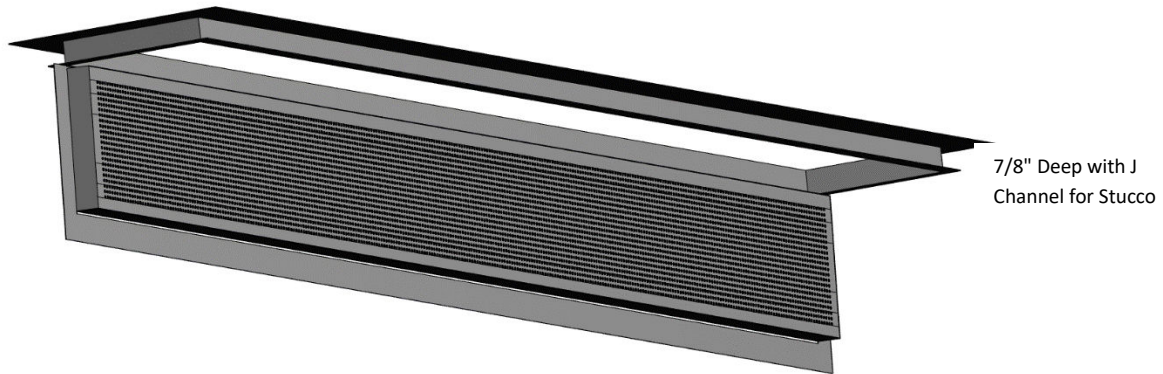

*Vent shown in open position, Close vent with appropriate fasteners (min. 3) along the front nail flange

| Model | Opening Size | Actual Vent Size | NFVA Provided | Flanges Available | Flange Definition | Weight |
|----------------------------------|--------------|------------------|---------------|--------------------------|--|--------|
| CS2011-PG-Removable | 4" x 60" | 3.5" x 59.5" | 59 Sq In | Plaster Ground/J Channel | J Channel with 7/8" setback with hinge | 4 lbs |
| Custom sizes/materials AVAILABLE | | | | | | |

BENEFITS:

- Easy Hinged Inspection Access to comply with **SB721 & SB326**
- Overlapping Baffle Protection (Patent Pending)
 - Air Flows through normally to help prevent rot
 - Resists the intrusion of Flames, Embers, Radiant Heat
- Ch 7A WUI Fire / **ASTM E2886** Approved California **BML Listing # 8165-2232:0502**
- **TRIPLE PROTECTION:** Anti -Clogging Overlapping Baffles, 1- hour fire rated Intumescent strips, plus 1/16" mesh on back side of vent.
- Prevents Rodent Entry
- 30 Year Warranty
- Easy to Install and Paint, also available in Stainless Steel

STANDARD MATERIALS

1/16" mesh standard unless otherwise requested

Astm A653/A653M- G90 hot dipped galvanized steel, 26 GA

Intumescent adhesive strips(1-2 hr fire rated) installed on internal baffles to provide extreme radiant heat/flame protection

ASTM D9092- mill phosphatized coating for painting.- If bonderized

ASTM b370- Sheet Copper, 16oz and 20oz- if copper

Installation: Install directly onto studs on the underside of the balcony, deck or walkway as needed to comply with local building codes.